


BLAGDON

B06


AIR OPERATED DOUBLE DIAPHRAGM PUMP

Metallic Series

B06 DIMENSIONS

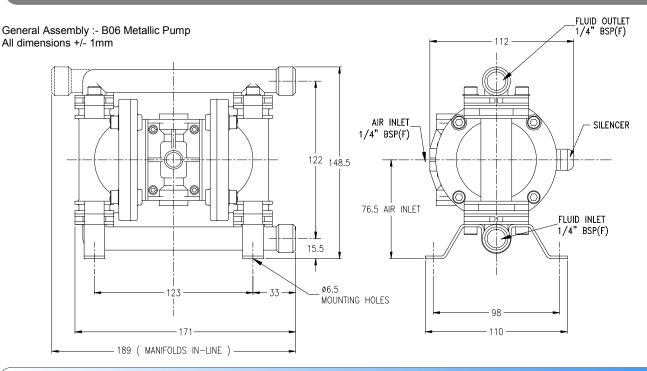

B06 PERFORMANCE

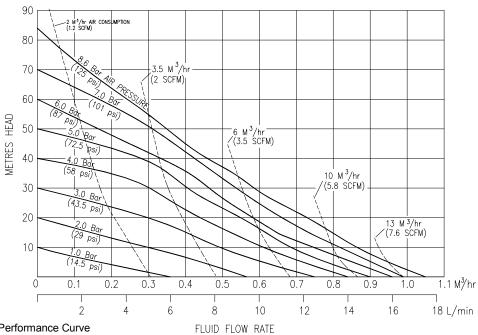


B06 Metallic Pump Performance Curve Performance based on water at ambient temperature

FLUID CONNECTIONS	CAPACITY	MAX SOLIDS	MAX DISCHARGE HEAD	DISPLACEMENT/STROKE
1/4" BSP(F)	0 - 18 Litres/Minute (0 - 3.9 Gallons/Minute)	1 MM (1/16")	88 Meters (289 ft)	0.022 Litres (0.0049 UK Gallons)
MAX. WORKING PRESSURE	AIR INLET	TEMPE	ERATURE LIMITS	PUMP WEIGHTS :-
8.6 Bar (125 psi)	1/4" BSP (F)	Determ	ined by Elastomers	SS :- 4.0 Kg QS :- 4.0 Kg

① Caution - Operating temperature limitations are as follows:	Operating Temperatures		
Materials	Maximum	Minimum	Optimum
EPDM - Shows very good water and chemical resistance. Has poor resistance to oils and solvents, but is fair on ketones and alcohols.	212°F	-11°F	50° to 212°F
	100°C	-24°C	10° to 100°C
Santoprene® - Injection moulded thermoplastic elastomer with no fabric layer. Long mechanical flex life. Excellent abrasion resistance.	212°F	-10°F	50° to 212°F
	100°C	-23°C	10° to 100°C
PTFE - Chemically inert, virtually impervious. Very few chemicals are known to react chemically with PTFE: molten alkali metals, turbulent liquid or gaseous fluorine and a few fluoro-chemicals such as chlorine trifluoride or oxygen difluoride which readily liberate free fluorine at elevated temperatures.	356°F	32°F	50° to 212°F
	180°C	0°C	10° to 100°C
Viton® - Shows good resistance to a wide range of oils and solvents : especially all allphatic, aromatic and halogenated hydrocarbons, acids, animal and vegetable oils. Hot water or aqueous solutions(over 70°F) will attack Viton®.	356°F	0°F	75° to 212°F
	180°C	-18°C	24° to 100°C

B06 PUMP CODE

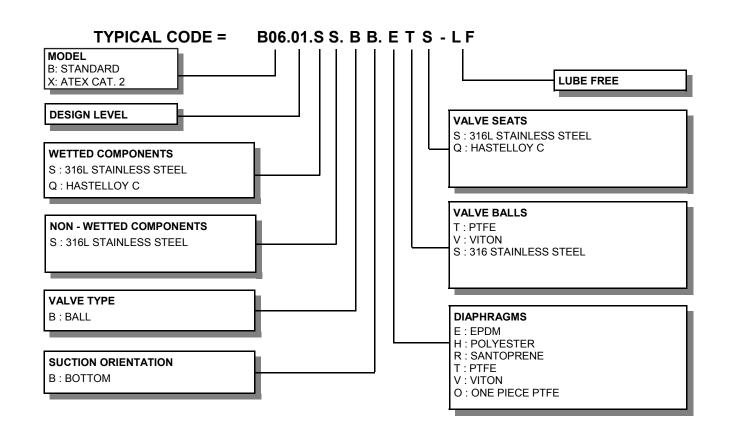

IMPORTANT

This pump should be used in accordance with the requirements of the Health and Safety at Work Act 1974. All business conducted subject to Blagdon Pump. Terms and Conditions of Sale, available on request.



LAMBERT ROAD, ARMSTRONG, WASHINGTON, TYNE & WEAR NE37 1QP ENGLAND.

TEL.: (0191) 4177475 FAX.: (019 Web Site: www.blagdonpump.com E-Mail: sales@blagdonpump.com FAX.: (0191) 4175435